

# **K&N** Installation Instructions

## **Part Number 33-2127**

This filter fits:       **See current K&N catalog for complete listing**

\*FREE K&N DECAL To register your warranty, please see us online at [knfilters.com/register](http://knfilters.com/register). FREE K&N DECAL\*

**Congratulations, you have purchased the finest air filter that money can buy. With proper care, this filter will last 1 million miles or more. This filter is a direct replacement for the stock air filter, and no modifications will be required. However the following procedure MUST be followed to ensure a proper fit and seal of the K&N Air Filter.**

### **INSTALLATION**

1. Loosen the hose clamp on the air intake tube and disconnect the intake tube from the airbox lid.
2. Remove the stock air filter. With a damp rag wipe out any dust or dirt from inside the airbox.
3. Inspect the K&N Air Filter making sure the metal support wires are seated in the grooves on the air filter. There is no need to remove these when servicing the filter. (Fig. 1)
4. Install the K&N Air Filters into the airbox base making sure that the side that says front is facing towards the front of the vehicle.
5. Reinstall the airbox lid, making sure that the four tabs on the airbox lid are fully seated into the four slots on the airbox base. (Fig. 2)
6. Reinstall the air intake tube onto the airbox lid and tighten the hose clamp.
7. Reset the restriction gauge on the airbox by pushing the button on the top. Service the filters at or before the restriction gauge indicates 75%.

**THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.**

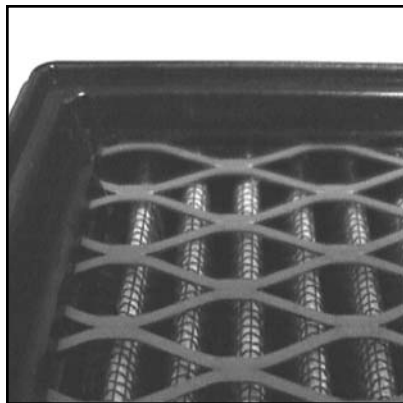


Fig. 1

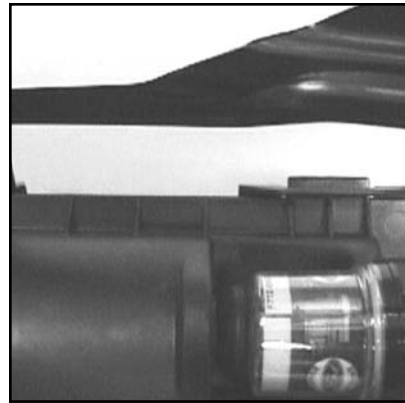


Fig. 2