



# INSTALLATION INSTRUCTIONS

## Part Number HD-8834

**This filter fits:** SEE CATALOG FOR CURRENT APPLICATIONS

Congratulations, you have purchased the finest air filter that money can buy. With proper care, this filter will last 1 million miles or more. This filter can be used in a stock machine, with no modifications required. If any engine modifications have been made tuning/jetting adjustments may be required. There are special installation instructions, so please follow the procedures outlined below to ensure the K&N air filter seals properly.

### INSTALLATION

1. Remove the stock air filter.
2. Carefully pry the stock air cleaner cover bracket off of the stock air filter. (Fig. 1)
3. Hold the bracket on the K&N® Filter and install the stock screws. (Fig. 2)
4. Reinstall the stock gasket onto the stock screws on the back of the K&N® Filter. (Fig. 3)
5. Install the K&N® Filter onto the stock air cleaner base and make sure it is completely seated.
6. Tighten the stock screws a few threads at a time in a clockwise pattern to insure the K&N® Filter is installed evenly. (Fig. 4)
7. Reinstall the stock air cleaner cover and tighten the screws.

**NOTE: Internal spacers may appear to be loose; this is normal. Spacers will seat properly when filter is installed on bike.**

**If you need any assistance please call 1-800-858-3333 to speak with a representative in our Customer Service Center before returning the product.**

**THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.**

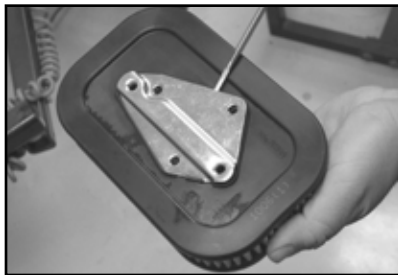


Fig. 1



Fig. 2



Fig. 3



Fig. 4